

# Nanoscience and Nanotechnology (Unit-V)

## ***1. Structure of Carbon Nanotubes***

The structure of a carbon nanotube is formed by a layer of carbon atoms that are bonded together in a hexagonal (honeycomb) mesh. This one-atom thick layer of carbon is called graphene, and it is rolled in the shape of a cylinder and bonded together to form a carbon nanotube. Nanotubes can have a single outer wall of carbon, or they can be made of multiple walls (cylinders inside other cylinders of carbon). Carbon nanotubes have a range of electric, thermal, and structural properties that can change based on the physical design of the nanotube.

## ***2. Types of carbon nanotubes (CNTs):***

The carbon nanotubes are of two types namely:

- Single walled carbon nanotubes (SWCNTs)
- Multiple walled carbon nanotubes (MWCNTs)



### **2.1. Single-walled carbon nanotube structure**

Single-walled carbon nanotubes can be formed in three different designs:

- Armchair
- Chiral
- Zigzag.

The design depends on the way the graphene is rolled into a cylinder. For example, imagine rolling a sheet of paper from its corner, which can be considered one design, and a different design can be formed by rolling the paper from its edge. This type is shown in the figure below

# Nanoscience and Nanotechnology (Unit-V)

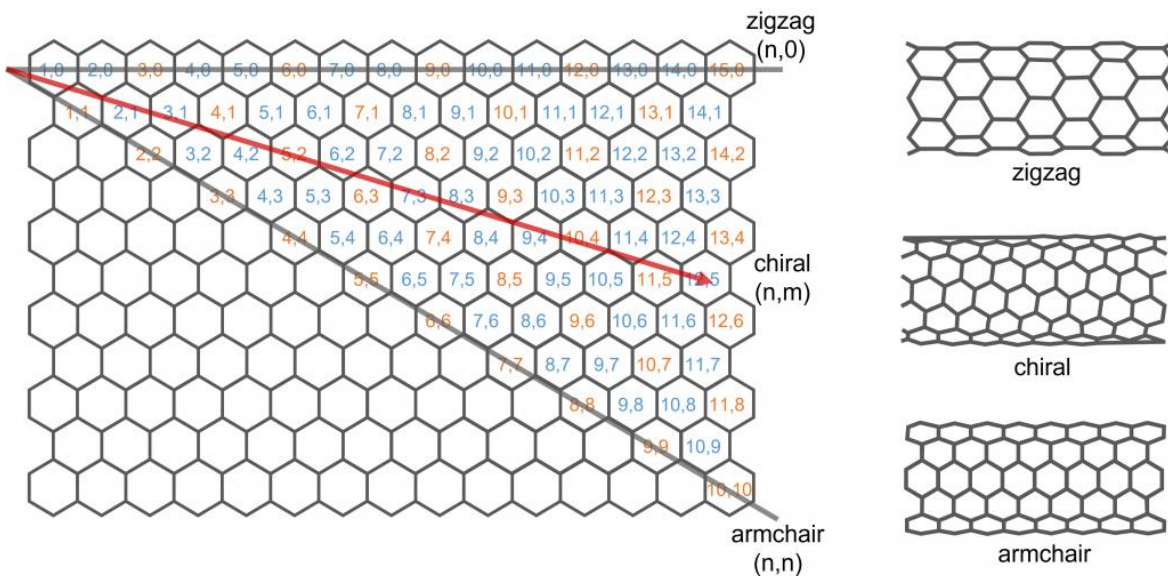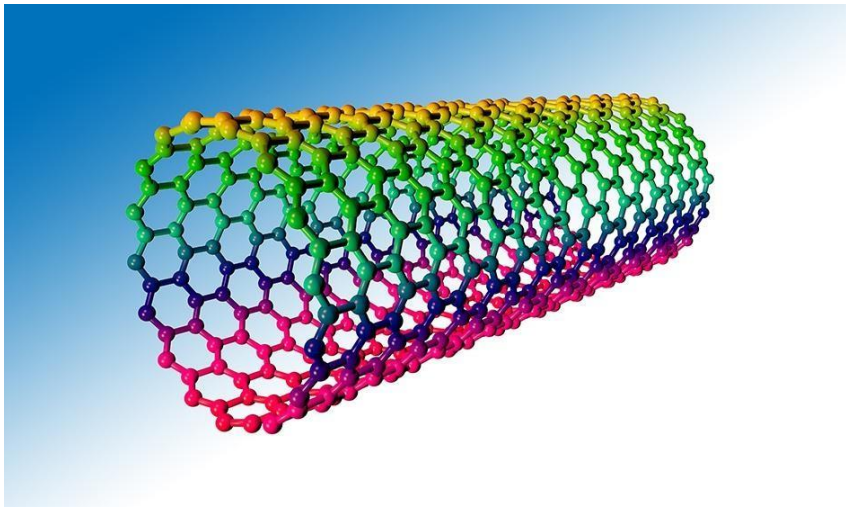


## 2.2. Multiple walled carbon nanotubes (MWCNTs):

MWCNTs consist of several coaxial cylinders, each made of a single graphene sheet surrounding a hollow core. The outer diameter of MWCNTs ranges from 2-100 nm, while the inner diameter is in the range of 1-3 nm, and their length is one to several micrometers .

MWCNTs structures can be split into two categories based on their arrangements of graphite layers: one has a parchment-like structure which consists of a graphene sheet rolled up around it and the other is known as the Russian doll model where layers of graphene sheets are arranged within a concentric structure.

# Nanoscience and Nanotechnology (Unit-V)

Decoration of multiwall carbon nanotubes (MWCNTs) consists of depositing nanoparticles on the MWCNT walls or ends, bonded by physical interaction with potential applications in catalysis, biosensors, biomedical, magnetic data storage, and electronic devices. The various methods used for this purpose include precipitation, hydrolysis at high temperature, or chemical decomposition of a metal precursor.

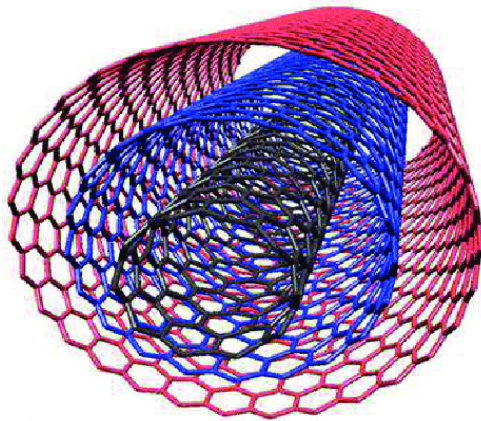

### ***3. Carbon Nanotubes Properties:***

- Strength and Elasticity
- Electrical Conductivity
- Thermal Conductivity And Expansion
- High Aspect Ratio.

#### **4.1. Strength and Elasticity of CNTs**

Carbon nanotubes have a higher tensile strength than steel and Kevlar. Their strength comes from the  $sp^2$  bonds between the individual carbon atoms. This bond is even stronger than the  $sp^3$  bond found in diamond. Under high pressure, individual nanotubes can bond together, trading some  $sp^2$  bonds for  $sp^3$  bonds. This gives the possibility of producing long nanotube wires. Carbon nanotubes are not **only strong, they are also elastic**. You can press on the tip of a nanotube and cause it to **bend without damaging** to the nanotube, and the nanotube will return to its original shape when the force is removed. A nanotube's elasticity

# Nanoscience and Nanotechnology (Unit-V)

does have a limit, and under very strong forces, it is possible to permanently deform to shape of a nanotube. A nanotube's strength can be weakened by defects in the structure of the nanotube. Defects occur from atomic vacancies or a rearrangement of the carbon bonds. Defects in the structure can cause a small segment of the nanotube to become weaker, which in turn causes the tensile strength of the entire nanotube to weaken. The tensile strength of a nanotube depends on the strength of the weakest segment in the tube similar to the way the strength of a chain depends on the weakest link in the chain

## **4.2. Electrical Conductivity of CNTs**

As mentioned previously, the structure of a carbon nanotube determines how conductive the nanotube is. When the structure of atoms in a carbon nanotube minimizes the collisions between conduction electrons and atoms, a carbon nanotube is highly conductive. The strong bonds between carbon atoms also allow carbon nanotubes to withstand higher electric currents than copper. Electron transport occurs only along the axis of the tube. Single walled nanotubes can route electrical signals at speeds up to 10 GHz when used as interconnects on semi-conducting devices. Nanotubes also have a constant resistivity.

## **4.3. Thermal Conductivity and Expansion of CNTs:**

The strength of the atomic bonds in carbon nanotubes allows them to withstand high temperatures. Because of this, carbon nanotubes have been shown to be very good thermal conductors. When compared to copper wires, which are commonly used as thermal conductors, the carbon nanotubes can transmit over 15 times the amount of watts per meter per Kelvin. The thermal conductivity of carbon nanotubes is dependent on the temperature of the tubes and the outside environment

Reports of several recent experiments on the preparation and mechanical characterization of CNT-polymer composites have also appeared. These measurements suggest modest enhancements in strength characteristics of CNT-embedded matrixes as compared to bare polymer matrixes. Preliminary experiments and simulation studies on the thermal properties of CNTs show very high thermal conductivity. It is expected, therefore, that nanotube reinforcements in polymeric materials may also significantly improve the thermal and thermo-mechanical properties of the composites.

# Nanoscience and Nanotechnology (Unit-V)

## 4.4. High Aspect Ratio:

CNTs represent a very small, high aspect ratio conductive additive for plastics of all types. Their high aspect ratio means that a lower loading (concentration) of CNTs is needed compared to other conductive additives to achieve the same electrical conductivity. This low loading preserves more of the polymer resins' toughness, especially at low temperatures, as well as maintaining other key performance properties of the matrix resin.


CNTs have proven to be an excellent additive to impart electrical conductivity in plastics. Their high aspect ratio (about 1000:1) imparts electrical conductivity at lower loadings, compared to conventional additive materials such as carbon black, chopped carbon fiber, or stainless steel fiber.

## 4. Methods of carbon nanotube synthesis

### Plasma based synthesis method or Arc discharge evaporation method

In Arc discharge methods, use of higher temperatures (above 1700 °C) for CNT synthesis, which usually causes the growth of CNTs with fewer structural defects in comparison with other techniques. The electric arc method, initially used for producing C<sub>60</sub> fullerenes. SWCNTs were produced subsequently in 1993 by the same.

In this method, a potential of 20–25 V is applied across the pure graphite electrodes separated by 1 mm distance and maintained at 500 torr pressure of flowing helium gas filled inside the quartz chamber.

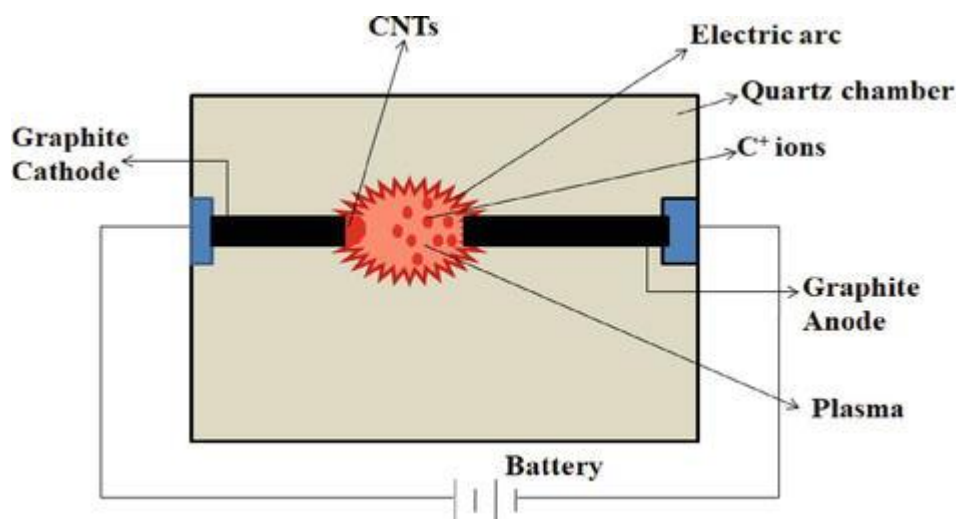

# Nanoscience and Nanotechnology (Unit-V)

When the electrodes are made to strike each other under these conditions it produces an electric arc. The energy produced in the arc is transferred to the anode which ionizes the carbon atoms of pure graphite anode and produces  $C^+$  ions and forms plasma (Plasma is atoms or molecules in vapor state at high temperature). These positively charged carbon ions move towards cathode, get reduced and deposited and grow as CNTs on the cathode. As the CNTs grow, the length of the anode decreases, but the electrodes are adjusted and always maintain a gap of 1 mm between the two electrodes. If proper cooling of electrodes is achieved uniform deposition of CNTs are formed on the cathode which is achieved by inert gas maintained at proper pressure. By this method multi-walled carbon nanotubes are synthesized and to synthesize single-walled carbon nanotubes catalyst nanoparticles of Fe, Co, and Ni are incorporated in the central portion of the positive electrode. The obtained CNTs are further purified to get the pure form of CNTs.

## Applications of Carbon Nanotubes

### CNTs Thermal Conductivity

CNTs have outstanding heat conductivity, electrical conductivity, and mechanical properties. They are probably **the best electron field-emitter possible**. They are polymers of pure carbon and can be made to and manipulated using the recognized and extremely rich chemistry of carbon. This offers the opportunity to alter their structure and to optimize their dispersion and solubility. CNTs are molecularly perfect, in the sense that they are generally free of property-degrading flaws in the nanotube structure. Their material properties can thus reach close to the very high levels intrinsic to them. Due to these extraordinary characteristics, CNTs can be prospectively used in a number of applications.

### CNTs Field Emission Applications

CNTs are the best known field emitters of any material. This is understandable, with regard to their high electrical conductivity, and the unbelievable sharpness of their tip (as the tip's radius of curvature becomes smaller, the electric field will be more concentrated, resulting in increased field emission; this is the same reason lightning rods are sharp). In addition, the sharpness of the tip also indicates that they emit at

# Nanoscience and Nanotechnology (Unit-V)

specifically low voltage, a key fact for building low-power electrical devices that employ this feature. CNTs can carry an amazingly high

# Nanoscience and Nanotechnology (Unit-V)

current density, probably as high as  $10^{13}$  A/cm<sup>2</sup>. Additionally, the current is extremely stable. Field-emission flat-panel displays are an immediate application of this behavior, receiving considerable interest. Unlike conventional cathode ray tube display where a single electron gun is used, CNT-based displays use a separate electron gun (or even many of them) for each individual pixel in the display. Their low turn-on and operating voltages, high current density, and steady, long-lived behavior make CNTs very attractive field emitters in this application. General types of low-voltage cold-cathode lighting sources, electron microscope sources, and lightning arrestors are other applications utilizing the field-emission characteristics of CNTs.

## **CNTs Conductive Plastics**

Over the past five decades, much of the history of plastics has involved their use as a substitute for metals. For structural applications, plastics have progressed tremendously, but not where electrical conductivity is needed, since plastics are very good electrical insulators. This deficiency can be ruled out by loading plastics up with conductive fillers, such as carbon black and larger graphite fibers (the ones used to make golf clubs and tennis rackets). In order to offer the necessary conductivity using conventional fillers, the loading required is typically high, however, leading to heavy parts and, more prominently, plastic parts whose structural properties are highly degraded. It is well known that as the aspect ratio of filler particles becomes high, the loading required to achieve a given level of conductivity becomes low. For this reason, CNTs are perfect because they have the highest aspect ratio of any carbon fiber. Furthermore, their natural tendency to form ropes offers inherently very long conductive pathways even at ultra-low loadings.

This behavior of CNTs is utilized in applications such as electrostatic dissipation (ESD); EMI/RFI shielding composites; coatings for gaskets, enclosures, and other uses; radar-absorbing materials for low-observable (–stealth!) applications; and antistatic materials and (even transparent!) conductive coatings.



# Nanoscience and Nanotechnology (Unit-V)

## **CNTs Energy Storage**

The intrinsic properties of CNTs make them the preferred material for use as electrodes in capacitors and batteries — two technologies of fast-growing significance. CNTs possess good electrical conductivity, an extremely high surface area ( $\sim 1000 \text{ m}^2/\text{g}$ ), and most importantly, their linear geometry makes their surface very accessible to the electrolyte.

Research has demonstrated that CNTs have the highest reversible capacity of any carbon material for use in lithium-ion batteries are currently being marketed for this application.

In addition, CNTs hold applications in various fuel cell components. They have several properties, such as high thermal conductivity and surface area, making them valuable as electrode catalyst supports in PEM fuel cells. Owing to their high electrical conductivity, they may also be used in gas diffusion layers, besides current collectors. The high strength and toughness-to-weight characteristics of CNTs may also prove useful as part of composite components in fuel cells that are used in transport applications, where durability is paramount.

## **CNTs Conductive Adhesives and Connectors**

The exact properties that make CNTs desirable as conductive fillers for use in ESD materials, electromagnetic shielding, and so on make them suitable for interconnection applications and electronics packaging, including coaxial cables, potting compounds, and adhesives and other types of connectors.

## **CNTs Molecular Electronics**

The idea of building electronic circuits out of the critical building blocks of materials — molecules — has seen growth in the past five years, and is a vital part of nanotechnology. In any electronic circuit, but specifically when dimensions reduce in size to the nanoscale, the interconnections between switches and other active devices become more

# Nanoscience and Nanotechnology (Unit-V)

and more essential. Their ability to be precisely derived, electrical conductivity, and geometry make CNTs the most suitable candidates for the connections in molecular electronics. Furthermore, they have been shown as switches themselves.

## **CNTs Thermal Materials**

The record-setting anisotropic thermal conductivity of CNTs is opening doors to several applications that involve heat transfer. Such an application is found in electronics, specifically advanced computing, where uncooled chips currently regularly exceed 100 °C.

The technology for creating aligned structures and ribbons of CNTs [D.Walters, et al., Chem. Phys. Lett. 338, 14 (2001)] is a step toward achieving extremely efficient heat conduits. Furthermore, composites with CNTs have been demonstrated to significantly increase their bulk thermal conductivity, even at incredibly small loadings.

## **CNTs Structural Composites**

The superior properties of CNTs are not just restricted to thermal and electrical conductivities but also include mechanical properties, such as strength, toughness, and stiffness. These properties pave the way for use in a range of applications exploiting them, including advanced composites that need high values of one or more of these properties.

## **CNTs Fibers and Fabrics**

Recently, fibers spun from pure CNTs have been demonstrated [R.H. Baughman, Science 290, 1310 (2000)] and are experiencing rapid development, together with CNT composite fibers. Such super strong fibers will have several applications such as woven fabrics and textiles, transmission line cables, and body and vehicle armor. CNTs are also being employed in order to make textiles stain resistant.

## **CNT Catalyst Supports**

CNTs intrinsically possess an enormously high surface area; actually, for SWNTs, every atom is not just on one surface — but two surfaces, the

# Nanoscience and Nanotechnology (Unit-V)

interior and exterior of the nanotube. Along with the ability to attach basically any chemical species to their sidewalls (functionalization) offers a prospect for unique catalyst supports. Their electrical conductivity may also be used propitiously in the quest for new catalysts and catalytic behavior.

## **CNTs Biomedical Applications**

Although the exploration of CNTs in biomedical applications is just in progress, it has great potential. Since a great part of the human body is made up of carbon, it is usually considered a very biocompatible material. The growth of cells on CNTs has been demonstrated; therefore, they apparently have no toxic effect. The cells also do not adhere to the CNTs, opening doors for applications such as anti-fouling coatings for ships and coatings for prosthetics.

The ability to functionalize (chemically modify) the sidewalls of CNTs also gives rise to biomedical applications including neuron growth and regeneration, and vascular stents. It has also been demonstrated that a single strand of DNA can be bonded to a nanotube, which can subsequently be effectively inserted into a cell.

## **CNTs Air and Water Filtration**

Several corporations and researchers have already developed CNT-based water and air filtration devices. It has been reported that these filters, apart from blocking the tiniest particles, can also destroy most bacteria. This is one more area where CNTs have already been commercialized and products are available now.

## **CNTs Ceramic Applications**

Materials scientists at UC Davis have produced a ceramic material reinforced with carbon nanotubes. The new material is significantly tougher than traditional ceramics, conducts electricity, and can both conduct heat and function as a thermal barrier, with respect to the nanotube orientation.

# Nanoscience and Nanotechnology (Unit-V)

Since ceramic materials are very hard and resistant to heat and chemical attack, they are valuable for applications such as coating turbine blades; however, they are also very brittle. The researchers mixed powdered alumina (aluminum oxide) with 5%–10% carbon nanotubes, in addition to 5% finely milled niobium. The mixture was treated with an electrical pulse in a process called spark-plasma sintering by the researchers. This process collates ceramic powders more rapidly and at lower temperatures than traditional processes.

The fracture toughness (resistance to cracking under stress) of the new material is up to five times of that of traditional alumina. The material exhibits electrical conductivity seven times of that of earlier ceramics made with nanotubes. It also has fascinating thermal properties, conducting heat in one direction, along the alignment of the nanotubes and, on the other hand, reflecting heat at right angles to the nanotubes, making it a preferred material for thermal barrier coatings.

## **Other Carbon Nanotubes Applications**

There are several other potential applications for CNTs, including solar collection, nanoporous filters, catalyst supports, and all kinds of coatings. There are almost certainly several surprising applications for this excellent material that will be revealed in the future, and which may prove to be the most significant and valuable ones of all. A number of researchers have been studying the conductive and/or waterproof paper produced using CNTs. CNTs have also been demonstrated to absorb infrared light and may hold applications in the I/R optics industry.